


REV	ECN NO.	DATE
A	N/A	2013.3.12

*Material: PBT+Glass Fiber (UL94V-0).
Insulator: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.
All material accord with ROHS.
*Specification:
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 100 MΩ Min. at DC 500V.
Contact Resistance: 1 Ω Max..
Operating Temperature: -40°C --- +105°C.

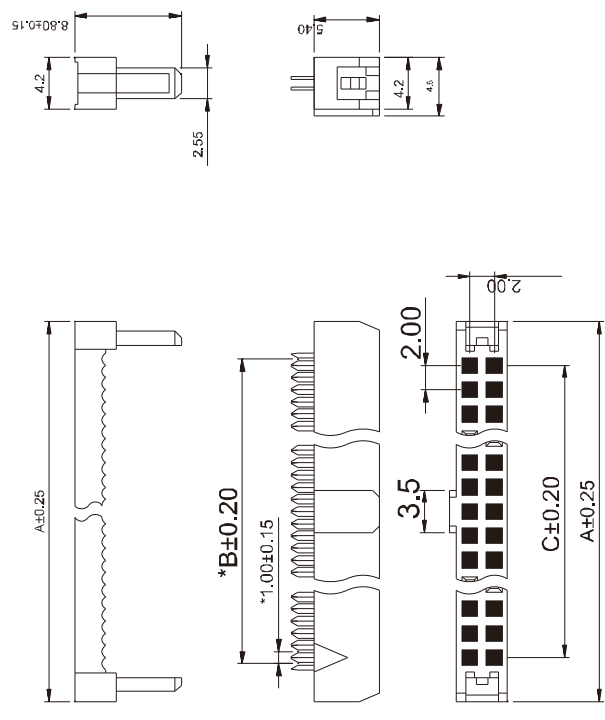

Pos.	Dim. A	Dim. B	Dim. C	Dim. A	Dim. B	Dim. C
6	11.20	5.00	4.00	26	31.20	24.00
8	13.20	7.00	6.00	30	35.20	28.00
10	15.20	9.00	8.00	34	39.20	32.00
12	17.20	11.00	10.00	40	45.20	38.00
14	19.20	13.00	12.00	44	49.20	42.00
16	21.20	15.00	14.00	50	55.20	48.00
18	23.20	17.00	16.00	60	65.20	58.00
20	25.20	19.00	18.00	64	69.20	62.00
24	29.20	23.00	22.00	80	85.20	78.00

SIGNATURE	DATE	TITLE	CODE NO.		TOLERANCE:	慈溪鸿伟电子有限公司 DRAWING NO. 成 品 图 !
DRN: GRP	2013.12.02	2.0X2.0mm IDC CONNECTOR	CUS. NO.	XX.	XX.	
CHK.		W.F.P/N:	SCALE	X.	X ±0.20	
APP.		MFC SERIES	UNIT	.XX ±0.10	ANG. ±	
			PAGE	1/1		